

# Component Video Switcher Series

**ITEM NO.: YS04A, YS04D**



Our component video switcher allows four different component video and stereo or digital audio sources to share two video displays. Manage multiple video sources manually or remotely with this convenient unit.

## **YS04A 4 Input 2 Output Component Video Switcher With Stereo Audio**


- HDTV Compatible at 480i/480p/720p/1080i/1080p.
- Connect up to 4 A/V sources to two display monitors.
- Expands both stereo audio and video input.
- The switcher box is the ideal for all of devices, offering both high-definition video and audio switching capability.
- IR remote control included.

## **YS04D 4 Input 2 Output Component Video Switcher With Digital Audio**


- Identical to YS04A, but with digital audio instead of stereo audio.
- Digital Audio: Coax or Optical option.

### **Installation View :**

#### **YS04A**


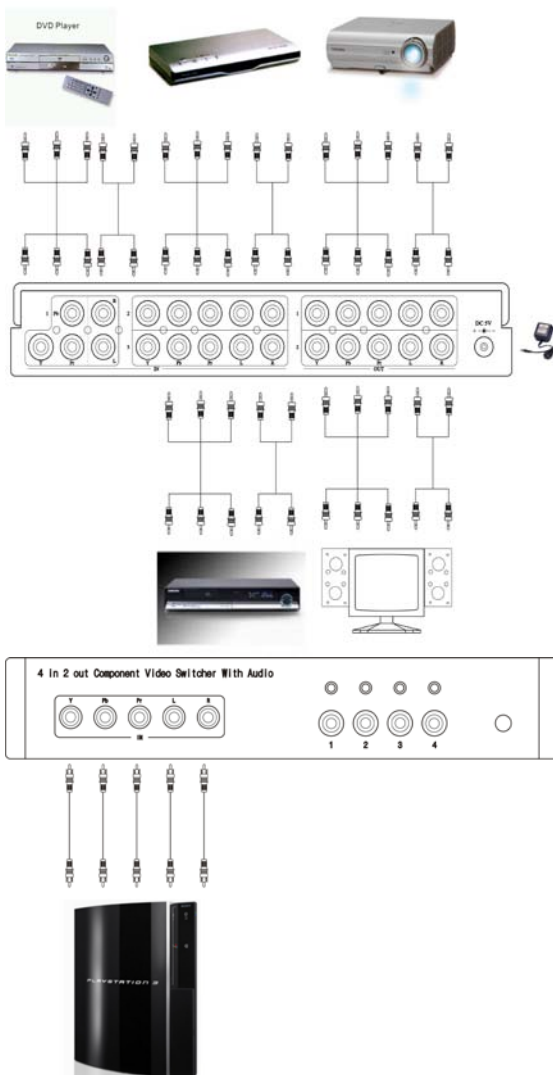


#### **YS04D**

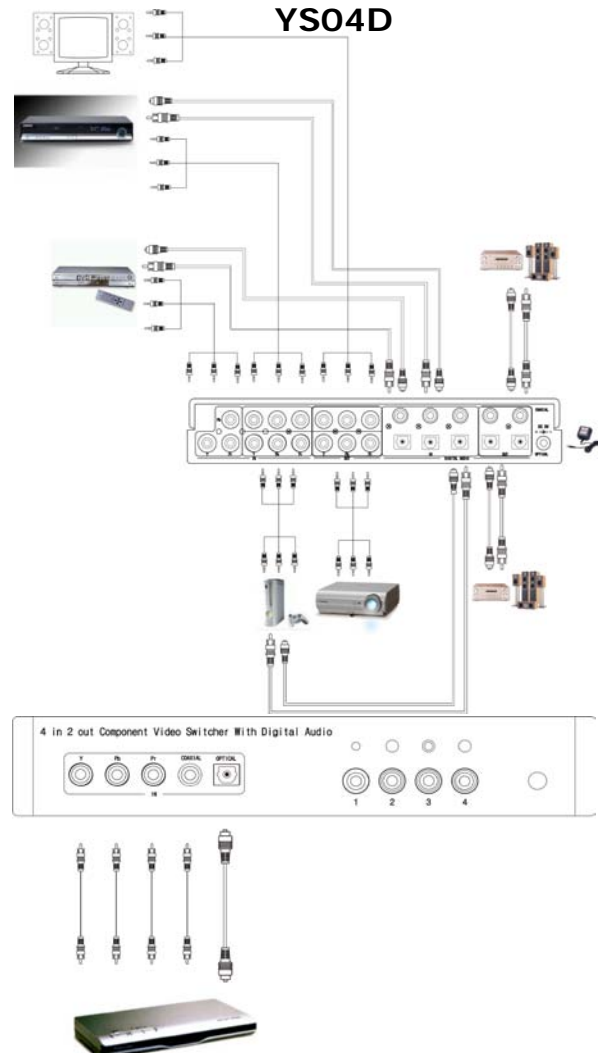


**Panel View :**

**YS04A**

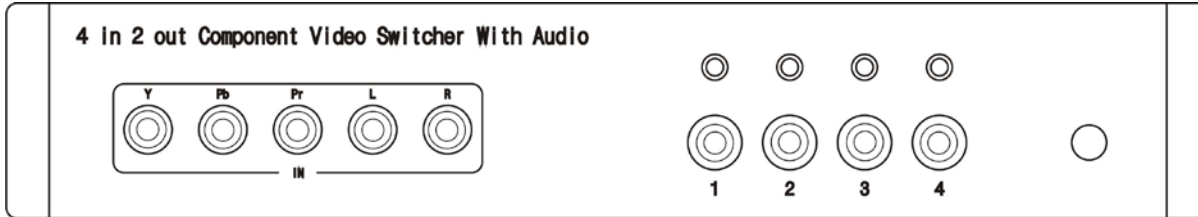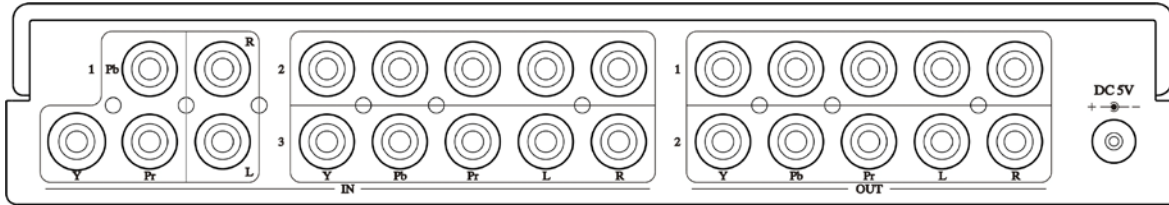

**YS04D**

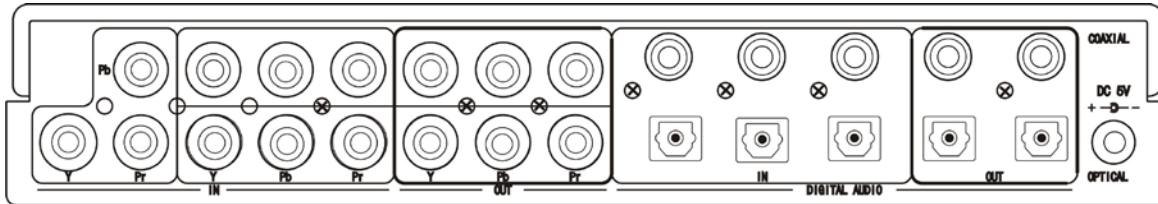

**Specification:**

ITEM NO.	YS04A	YS04D
Input Resolution	480i , 480p , 576i , 576p , 720p , 1080i , 1080p	
Video Bandwidth	400Mhz	
Video Input (RCA)	RCA x 12 : Y (75Ω , 1.0 Vp-p) , Pb Pr (75Ω , 0.7 Vp-p)	
Video Output (RCA)	RCA x 6 : Y (75Ω , 1.0 Vp-p) , Pb Pr (75Ω , 0.7 Vp-p)	
Audio Bandwidth	DC-20Khz	
Audio Input	RCA x 8 (10KΩ)	X
Audio Output	RCA x 4 (10KΩ)	X
Digital Audio Input	X	Coaxial RCA x 4 (75Ω) , Optical x 4
Digital Audio Output	X	Coaxial RCA x 2 (75Ω) , Optical x 2
Power Supply	DC 5V 500mA	
Power Consumption	250mA (Max)	
Temperature	Operation: 0 to 55°C, Storage: -20 TO 85°C, Humidity: up to 95%	
DIMENSIONS mm	225x173x40	
WEIGHTS g	908	875



Rev. B